


Materials/Finishes:	Hot-Dip Galvanized (428KTHDG) T-316 Stainless Steel: 2"-12" (428KTSX)
Variants:	N/A
Service:	Designed to support pipe horizontally. Straight cut pipe thread on nipple provides up to 4-1/2 inches of vertical adjustability.
Approvals:	Complies with Manufacturers' Standardization Society MSS SP-58 (Type# 38)
Ordering:	Specify figure number, finish and pipe size.
Notes:	Saddles accommodate ductile iron pipe and IPS. Support requires 2" schedule 40 (3" schedule 40 for sizes 14" and 16") extension pipe (not supplied) to be cut in the field.

428 SADDLE SPECIFICATIONS						
SIZE	A	B	C	D	E	THREAD SIZE
2	1.750	3.500	1.500	2.000	0.375	1-1/4 - 7
3	2.030	4.060	1.500	2.000	0.375	1-1/4 - 7
4	2.450	4.900	1.500	2.000	0.375	1-1/4 - 7
6	3.500	7.000	1.500	2.000	0.500	1-1/4 - 7
8	4.580	9.160	1.500	2.000	0.500	1-1/4 - 7
10	5.600	11.200	1.500	2.000	0.500	1-1/4 - 7
12	6.650	13.300	1.500	2.000	0.500	1-1/4 - 7
14	7.750	15.500	3.000	3.000	0.500	2-1/2 - 4
16	8.800	17.600	3.000	3.000	0.500	2-1/2 - 4

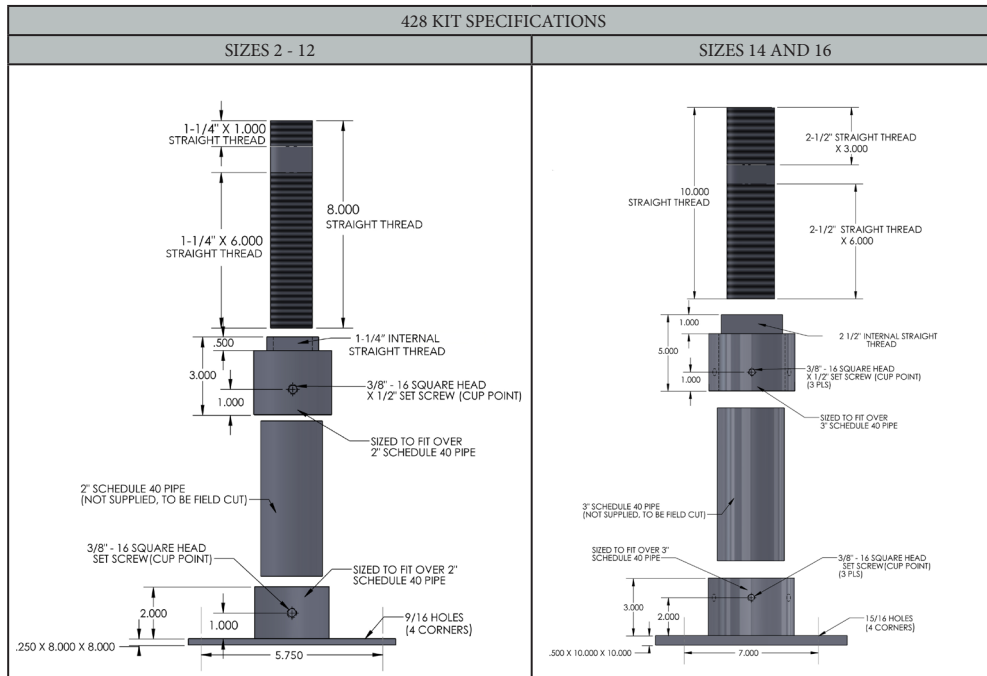

PROJECT INFORMATION	APPROVAL STAMP
Project:	Notes:
Address:	
Contractor:	
Engineer:	
Date:	
Approved      Approved as Noted      Not Approved	