


Materials/Finishes:	Hot-Dip Galvanized (429KTHDG)	T-316 Stainless Steel: 3"-12" (429KTSX)
Variants:	N/A	
Service:	Designed to support pipe horizontally. Straight cut pipe thread on nipple provides up to 4-1/2 inches of vertical adjustability.	
Approvals:	Complies with Manufacturers' Standardization Society MSS SP-58 (Type# 37)	
Ordering:	Specify figure number, finish and pipe size.	
Notes:	Saddles accommodate ductile iron pipe and IPS. Support requires 2" schedule 40 (3" schedule 40 for sizes 14" and 16") extension pipe (not supplied) to be cut in the field.	

429 SADDLE SPECIFICATIONS							
SIZE	A	B	C	D	E	F	THREAD SIZE
2	1.500	90°	1.500	2.000	0.375	1/2-13	1-1/4 - 7
3	2.030	130°	1.500	2.000	0.375	1/2-13	1-1/4 - 7
4	2.450	130°	1.500	2.000	0.375	1/2-13	1-1/4 - 7
6	3.500	130°	1.500	2.000	0.500	5/8-11	1-1/4 - 7
8	4.580	130°	1.500	2.000	0.500	5/8-11	1-1/4 - 7
10	5.600	130°	1.500	2.000	0.500	5/8-11	1-1/4 - 7
12	6.650	130°	1.500	2.000	0.500	5/8-11	1-1/4 - 7
14	7.750	130°	3.000	3.000	0.500	7/8-9	2-1/2 - 4
16	8.800	130°	3.000	4.000	0.500	7/8-9	2-1/2 - 4

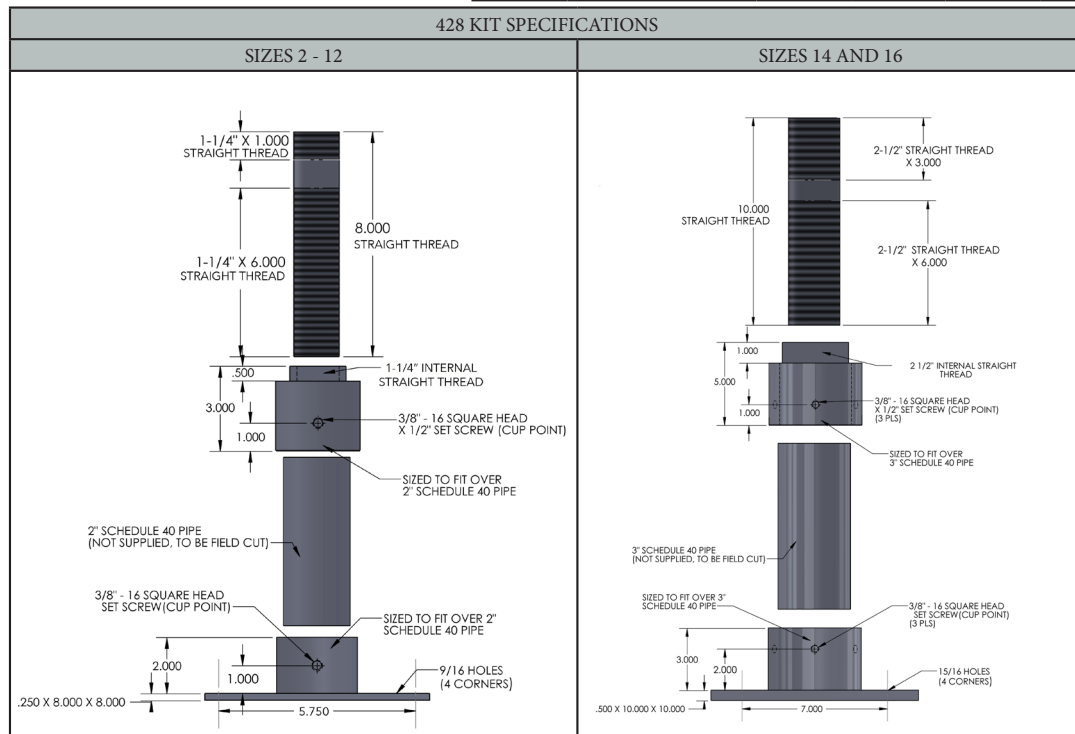

PROJECT INFORMATION			APPROVAL STAMP
Project:			Notes:
Address:			
Contractor:			
Engineer:			
Date:			
Approved	Approved as Noted	Not Approved	